


DOMTEK - PB-RIB Panel

Grade 80

Imperial

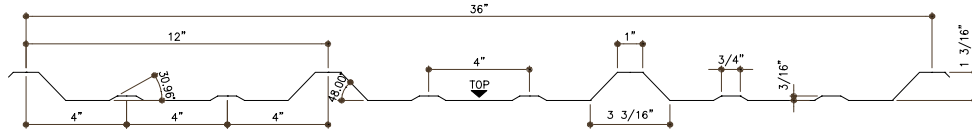

Physical Properties		Per Foot Width - In accordance with CSA S136-01 - Limit States Design								
Thickness		Weight	Yield Strength	Section Modulus		Moment of Inertia	Factored Moment Resistance		Specified Crippling Bearing N = 1.5 in.	
Gauge	Base	Z275		Mid	Support	Mid Span	Mid	Support	End	Interior
	(in.)	(lb/ft ²)	(ksi)	(in. ³)	(in. ³)	(in. ⁴)	(ft-lb)	(ft-lb)	(lb)	(lb)
29	0.0135	0.720	54	0.0184	0.0301	0.02481	82.95	135.47	105	183
26	0.0180	0.950	54	0.0306	0.0479	0.03453	137.52	215.76	198	316

Load Table		Maximum Specified Uniformly Distributed Load in lb/ft ² (psf)					
Span	Gauge	1 Span		2 Span		3 Span	
		29	26	29	26	29	26
(ft)							
2	B	111	183	181	288	173	286
	D	271	377	646	898	512	712
2.5	B	71	117	116	184	111	183
	D	139	193	331	460	262	364
3	B	49	81	80	128	77	127
	D	80	112	191	266	152	211
3.5	B	36	60	59	94	56	94
	D	51	70	120	168	95	133
4	B	28	46	45	72	43	72
	D	34	47	81	112	64	89
4.5	B	22	36	36	57	34	57
	D	24	33	57	79	45	62
5	B	18	29	29	46	28	46
	D	17	24	41	57	33	46
5.5	B	15	24	24	38	23	38
	D	13	18	31	43	25	34
6	B	12	20	20	32	19	32
	D	10	14	24	33	19	26
6.5	B	10	17	17	27	16	27
	D	8	11	19	26	15	21
7	B	9	15	15	23	14	23
	D	6	9	15	21	12	17
7.5	B	8	13	13	20	12	20
	D	5	7	12	17	10	13
8	B	7	11	11	18	11	18
	D	4	6	10	14	8	11

Notes:

- Properties and loads are based on Grade 80 Steel with a minimum yield stress of 80,000 psi and a maximum yield stress under factored loads of 54,000 psi.
- Figures in Row B indicate the load capacity based on strength. Strength capacity B should be checked against [Specified Live Load] + [0.833 x Specified Dead Load].
- Figures in Row D indicate the load capacity based on deflection of 1/180th span. For allowable deflection of 1/90th of the span, values in Row D can be doubled, but must not exceed the value in Row B. Deflection capacity should be checked against Specified Load(s).
- Specified web crippling capacity should be checked against specified load at support location.

Notes to the Designer:

- The Load Tables were developed in accordance with CSA S136-01 - North American Specification for the Design of Cold Formed Steel Structural Members and S136S1-04 - Supplement 2004 to the North American Specification for the Design of Cold Formed Steel Structural Members.
- The Load Tables were developed using Limit States Design principles.
- The Load Tables are based on specified uniformly distributed loads only.
- The effective moment of inertia for deflection determination has been calculated at a specified live load stress of 0.6F_y.
- Specified Web Crippling loads were determined using a bearing width of 1.5".
- The load tables do not consider the effect of pattern loading.
- The load tables do not account for concentrated loads.
- All span applications assumes all spans are equal.