


DOMTEK - Tuff- Rib Panel

Grade 80

Imperial

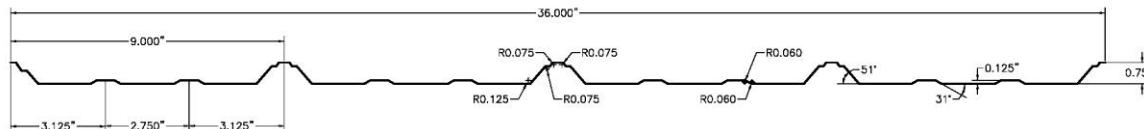

Physical Properties		Per Foot Width - In accordance with CSA S136-01 - Limit States Design								
Thickness		Weight	Yield Strength	Section Modulus		Moment of Inertia	Factored Moment Resistance		Specified Crippling Bearing N = 1.5 in.	
Gauge	Base	Z275		Mid	Support	Mid Span	Mid	Support	End	Interior
	(in.)	(lb/ft ²)	(ksi)	(in. ³)	(in. ³)	(in. ⁴)	(ft-lb)	(ft-lb)	(lb)	(lb)
28	0.0135	0.720	48	0.0108	0.0158	0.0066	43.19	63.34	94	152
26	0.0180	0.950	48	0.0142	0.0258	0.0087	57.00	103.28	175	262

Load Table		Maximum Specified Uniformly Distributed Load in lb/ft ² (psf)				
Span		1 Span		2 Span		3 Span
		Gauge		Gauge		Gauge
(ft)		28	26	28	26	28
2	B	58	76	75	99	71
	D	72	95	171	225	135
2.5	B	37	49	48	63	46
	D	37	48	87	115	69
3	B	26	34	33	44	32
	D	21	28	51	67	40
3.5	B	19	25	24	32	23
	D	13	18	32	42	25
4	B	14	19	19	25	18
	D	9	12	21	28	17
4.5	B	11	15	15	20	14
	D	6	8	15	20	12
5	B	9	12	12	16	11
	D	5	6	11	14	9
5.5	B	8	10	10	13	9
	D	3	5	8	11	7
6	B	6	8	8	11	8
	D	3	4	6	8	5
6.5	B	5	7	7	9	7
	D	2	3	5	7	4
7	B	5	6	6	8	6
	D	2	2	4	5	3
7.5	B	4	5	5	7	5
	D	1	2	3	4	3
8	B	4	5	5	6	4
	D	1	1	3	4	2

Notes to the Designer:

1. The Load Tables were developed in accordance with CSA S136-01 - North American Specification for the Design of Cold Formed Steel Structural Members and S136S1-04 - Supplement 2004 to the North American Specification for the Design of Cold Formed Steel Structural Members.
 2. The Load Tables were developed using Limit States Design principles.
 3. The Load Tables are based on specified uniformly distributed loads only.
 4. The effective moment of inertia for deflection determination has been calculated at a specified live load stress of $0.6F_y$.
 5. Specified Web Crippling loads were determined using a bearing width of 1.5".
 6. The load tables do not consider the effect of pattern loading.
 7. The load tables do not account for concentrated loads.
 8. All span applications assumes all spans are equal.

Notes:

- Properties and loads are based on Grade 80 Steel with a minimum yield stress of 80,000 psi and a maximum yield stress under factored loads of 48,000 psi.
 - Figures in Row B indicate the load capacity based on strength. Strength capacity B should be checked against [Specified Live Load] + [0.833 x Specified Dead Load].
 - Figures in Row D indicate the load capacity based on deflection of 1/180th span. For allowable deflection of 1/90th of the span, values in Row D can be doubled, but must not exceed the value in Row B. Deflection capacity should be checked against Specified Load(s).
 - Specified web crippling capacity should be checked against specified load at support location.